


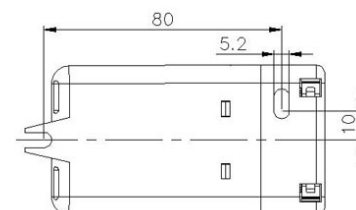


MODEL : HT 1050

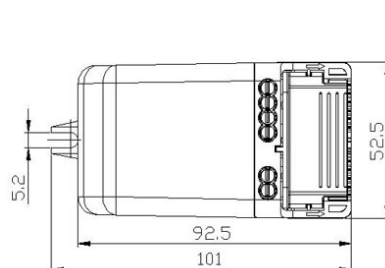

The transformer is also approved as built-in type, to fit in compact lamp housing:



Secondary side

*2 poles, 10A each, for wire 1.0mm² - 2.5mm².

*Push-in terminals

*Tool free strain relief

Primary side

*4 poles, 10A each, for power input and output. Wire 1.0mm² - 2.5mm².

*Push-in terminals

*Tool free strain relief.

*Dimmable with trailing edge dimmer and leading edge dimmer, noise free

*lamp wattage: 35-50W

*over load and short-circuit protection, automatic restart on removal of obstacles.

*protection against overheating with automatic restart on removal of overheating

*Soft start, 50,000 service hours.

*Up to 30 transformers can be parallel connected.

*Protection class II

MODEL		HT1050
primary voltage	VAC	220-240
input current at 230V/50Hz①	A	0.23
frequency	Hz	50/60
secondary voltage①	V	11.5
lamp wattage	VA	35-50
efficiency	%	>92
power factor	λ	>0.97
ambient temperature ta	°C	-18 to +75
rated max. temperature tc	°C	90
softstart		yes
dimming		Trailing edge and leading edge dimming
dimensions LxWxH	mm	92.5x52.5x35
weight	kg	0.18

①valid at 100% dimming level